



Ultraleather Pro — Ultrafabrics




Ink and denim resistant • EPA-registered antimicrobial protection

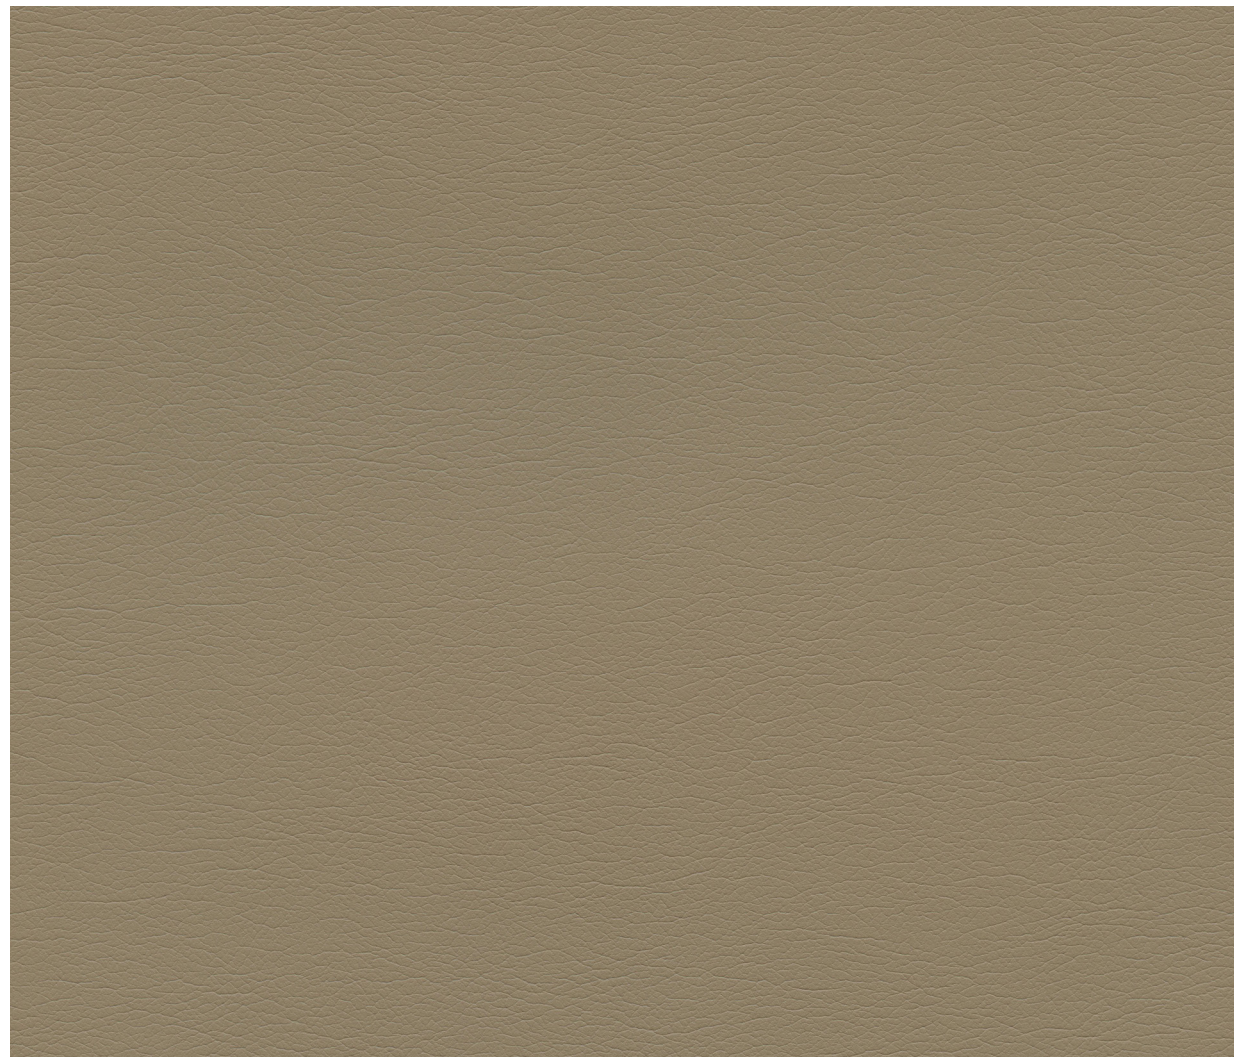

554-3894 Hazelwood



554-0008 White Wash



554-3412 Salt




554-6547 Dawn Grey




554-6566 Moon Glow



554-3087 Woodcres



554-3811 Swan



554-3803 Parfait




554-5733 Mortar




554-5626 Char




554-5618 Dark Knight




554-3352 Shore



554-8251 Melon



554-5648 Cloud




554-2661 Blue Bird



554-4424 Chino




554-3894 Hazelwood




554-8254 Rosy Coral




554-7200 Blush



554-2522 Capri



554-4333 Arugula




554-3595 Cork




554-8229 Campfire



554-9441 Maue




554-2530 Sky




554-4315 Agave




554-3444 Toasted Bagel




554-1329 Rhubarb




554-9451 Azalea



554-2711 Blueberry




554-4530 Coastal



554-3835 Raw Sienna



554-3209 Cougar



554-1357 Cranberry




554-2616 Oxford Blue




554-4534 Sherwood



554-3376 Dark Chocolate



554-2547 Sailor



Ultraleather Pro from Ultrafabrics

Application

Interior Upholstery

General Specifications

Composition:

100% Polycarbonate Polyurethane Surface
100% Reinforced Rayon Backing
containing TENCEL™ Modal fibers

Weight:

Approx. 14.6 oz. Per Linear Yard
Approx. 9.7 oz. Per Square Yard
Approx. 330 Grams Per Square Metre

Thickness:

Approx. 0.95 Millimetres

Width:

54 Inches / 137 Centimetres

Repeat:

None

Performance

Abrasion:

ASTM D4157 / 500,000 Double Rubs (Wyzenbeek)*
BS EN ISO 12947-2 / 200,000 Rubs (Martindale)*
*meets or exceeds

Hydrolysis:

16 Weeks
ASTM D3690 Sect. 6.11 (Hydrolytic Stability)
ISO 1419 Method C (Accelerated Ageing)

Adhesion of Coating: ASTM D751

Tear Strength: ASTM D2261

Breaking Strength: ASTM D751

Antimicrobial: ASTM E2180

Tensile Strength: BS EN ISO 1421

Colorfastness

Light: AATCC 16.3, 200 Hours, Grade 4
ISO 105 B02, Grade 6
Crocking: AATCC 8, Grade 4-5 Wet & Dry

Flammability Requirements

- ASTM E84 (Adhered) - Class A
- CA TB 117-2013 - Pass
- FMVSS 302 & 95/28 Annex IV - Pass
- NFPA 260 - Class 1
- UFAC - Class 1

These fabrics, when treated and/or used with other compatible furniture components, have been shown to perform under the fire test conditions of:

- ASTM E84 (Unadhered)
- IMO FTPC Part 8
- BS EN 1021 Parts 1 & 2
- BS 5852 Source 0, 1 & 5 (Cig, Match & Crib 5)

Ultraleather Pro Resists:

- Ballpoint ink
- Blood
- Mustard and Ketchup
- Betadine
- Denim*
- Red Wine

* Removal of denim dye may vary depending on the period of time the stain sets in. While Ultraleather Pro offers excellent protection, full removal is not guaranteed.

For more information on certifications and standards, sustainability, as well as cleaning and care instructions, please visit our website.



TENCEL™ is a trademark of Lenzing AG

ultrafabricsinc.com

Ultrafabrics® and logo, and Ultraleather® are registered trademarks of Ultrafabrics Inc. Made in Japan.

