


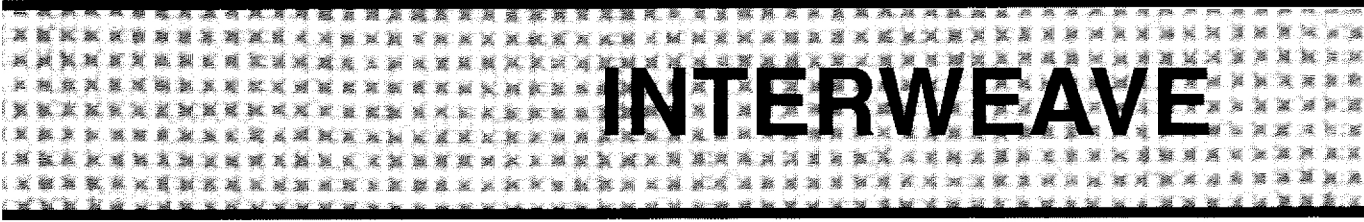


Contract Fabrics

A horizontal band of fabric featuring a repeating geometric pattern of small squares and diamonds in a light beige color. The word 'INTERWEAVE' is printed in large, bold, black capital letters across the center of this band.

INTERWEAVE

New Colors For 2025

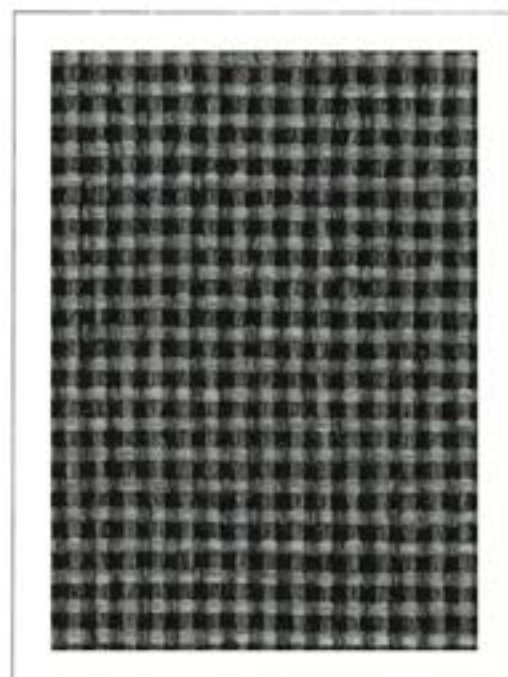

Steel



Slate



Walnut



Cement




Smoke



Tumbleweed



Bisque



Oyster



Ashley




Granite



Arrowwood



Basil



Platinum



Flint




Coal



Khaki



Cornflower



Charcoal



Pebble



Black



Serene



Earth



Angelina



Scarlet



Salem



Highlands



Sapphire



Amethyst



Brick



Sage



Denim



Fédéral



Mocha



Holly



Aspen



Dark Blue



Lapis



Brown



Claret



Tarragon



Capri



Liberty



Sable



Maroon




Emerald



Lilac



Indigo




Pewter



Brown Haze



Oatmeal




Hazelnut



Chocolate



Russet



Bark




Espresso




Cafe




Gold Dust




Chocaqua




Lichen




Frosted Blue



Midnight




Marine




Everton Blue




Cobalt



Purple Velvet




Cadet




Cordovan




Meritage




Westham



Black Cherry



Chili



Ruby




Cabernet




Firey Rust




Rusty Sable




Dark Mauve



Quartz




Rosemary














Thorton



Avocado



Cactus



INTERWEAVE®

Specifications

CONTENT	100% Polyolefin	COLORFASTNESS	AATCC-8 Wet – Class 4.5 Dry – Class 5
WEIGHT	18.0 ± 0.5 oz per Linear Yard	FLAMMABILITY	Cal 117-2013
WIDTH	54 inches	CLEANING CODE	WS – water based cleaning agents
ABRASION	ASTM-D-4157 250,000 + DR	PATTERN DIRECTION	Non-Directional
LIGHTFASTNESS	AATCC-16E 400 Hours, Class 5	FINISH	Imperviseal
STRENGTH RETENTION	ASTM D 5034 400 Hours, Xenon Arc. Exceeds 50% strength retention	BACKING	Acrylic

Interweave® is covered by a 10-year limited performance warranty for contract applications and a 2-year limited warranty for transportation

SUGGESTED APPLICATIONS

- OFFICE
- HEALTHCARE
- HOSPITALITY
- SCHOOL
- WORSHIP
- THEATRE

Tahoe's commitment to environmental responsibility is reflected by our beautiful, sustainable fabrics and efficient technical processes. The relationship between our manufacturing facility, the community and nature insure that we leave as little waste as possible for present and future generations. We strive to protect our environment and wildlife for future generations to enjoy. One hundred percent of our raw materials and loom waste are recyclable, which leaves very little waste in our manufacturing process. Tahoe uses only U.S. manufactured polyester, olefin and cotton yarns which result in our "no waste" products. Along with our yarns, our chemicals and latex are all environmentally safe. Our goal is to concentrate more on weave structures which can lessen the need for chemical treatments.

